



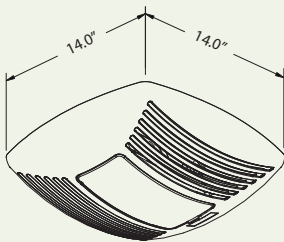


Delta BreezSignature Ventilation Fan / Light Combo Specifications

VFB25ADL
(110 CFM)

Dimensions

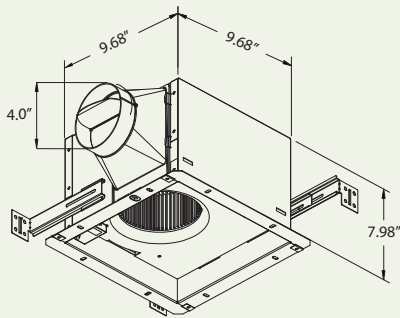

Fan Curve

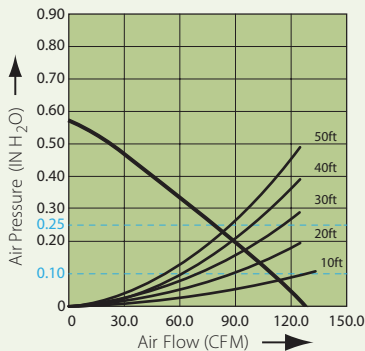

Description

Low noise ceiling mount ventilating fan with DC Motor and light rated for continuous running. Evaluated by Underwriter Laboratories and conforms to both UL and cUL safety standards.

Motor/Blower

- Power Rating of 120volts/60Hz.
- DC Brushless motor engineered to run continuously.
- Motor equipped with thermal cutoff fuse.
- Permanently lubricated motor.

Housing

- Galvanized steel body.
- Detachable 4" diameter duct adapter.
- Built in backdraft damper.
- Easy installation.

Grille

- Attractive design using ABS material.

Light

- One GU24 26-Watt compact fluorescent lamp included.
- One E12 4-Watt night-light included.

Warranty

- 3 year limited warranty.

Features

- For ceiling mount only, air flow of 110 CFM ($\pm 10\%$) and 1.1 Sones at 0.1" static pressure.
- Power consumption approximately 15.4 Watts with an efficiency rating approximately 7.1 CFM/Watt at 0.1" static pressure.
- Duct diameter no less than 4".
- UL and cUL listed for tub/shower enclosure when used with GFCI branch circuit wiring.

DC Motor Technology

- Built in soft start function to increase bearings life.
- Automatically powers OFF when impeller is locked abnormally.

Specifications

VFB25ADL	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	110	89
Sones	1.1	1.4
Power Consumption (Watts)	15.4	17.2
Energy Efficiency (CFM/Watt)	7.1	5.0
Speed (RPM)	1037	1213
Current (Amps)	0.26 @ 120 Vac	
Power Rating (V/Hz)	120 / 60	
Lamp (Watts)	26	
Night-light (Watts)	4	