

Delta Air Mover

AMR1200

Features


- High efficiency brushless DC motor, offers energy savings of up to 70% compared with similar products with AC motors.
- Delivers 1,200CFM of airflow while using only 97W and 1.4Amps.
- Super low noise operation of 55 dB-A at high speed, up to 12 dB-A lower than similar models.
- Digital control panel with LED display controls 3 speeds, timer function, and continuous time counter, up to 99Hrs.
- Patented dual blade design creates an airflow stream up to 32ft.
- Low 1.4Amp draw allows for up to 8 units to be daisy-chained with 2 receptacles (15A circuit breaker).
- Stackable up to 4 units high for easy storage.
- Lightweight 12.4lb design, Arc-shaped handle, and balanced center of gravity allows for easy carrying.
- 3-angle drying positions (0°, 45°, 90°) can be used.



Applications

Drying floors & carpet, ceilings & walls paint / Indoor air circulation / Bathroom / Garage cooling / Basements / Work space / Exhibition hall / Supermarket / Theater

Dimensions unit: inch

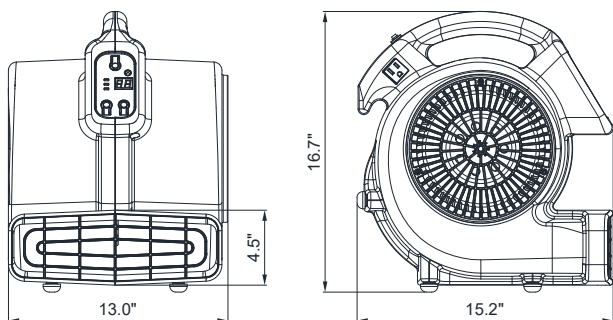

3-angle drying positions



Specifications

Model	Net Weight	Nominal Voltage	Input Power	Current	Speed	Airflow	Noise
PART NO.	Lb	VAC / Hz	Watt	Amp.	RPM	CFM	dB-A
AMR1200	12.4	120 / 60	30	0.5	642	800	45
			56	0.9	804	1000	51
			97	1.4	966	1200	55

* Noise is measured in semi-anechoic chamber in free air, with three microphone at back and two side in 3.28 feet for average.

* The test result of the airflow in free air is central value with tolerance range of $\pm 10\%$.

* All readings are typical values at rated voltage.

* Specifications are subject to change without notice.