



Fan with Humidity Sensor - (130 CFM)



4" Duct (Standard):

130 CFM/2.0 Sones @ 0.1" SP, 22 Watts 105 CFM/--- Sones @ 0.25" SP, 22 Watts





Description

Low noise ceiling mount ventilating fan with humidity sensor rated for continuous running. Fan has been awarded ENERGY STAR® qualified. It is HVI, UL, and cUL certified to comply with ASHRAE 62.2 local and whole building continuous and intermittent operation. Meets CA Title 24 requirements.

DC Motor/Blower

- Power Rating of 110~220volts/50~60Hz
- Motor equipped with thermal cutoff fuse
- · Permanently lubricated motor
- Allows fan to operate in full speed mode or humidity control mode by cycling ON/OFF switch
- Built-in soft start function to increase bearings' life
- · Automatically powers off when impeller is locked abnormally

Housing

- Galvanized steel body
- Detachable 4" diameter duct adapter
- Built-in backdraft damper
- Easy installation with expandable extension bracket

Grille

- · Attractive design using ABS material
- Attaches directly to housing with torsion springs

LED Indicator

• Blue and Amber LED indicator lights to show humidity sensor and full speed modes


Warranty


• 3-Year limited warranty

BreezSignature 130HS	4" Duct (Standard)	
Static Pressure (inches w.g.)	0.1	0.25
Air Flow (CFM)	130	105
Sones	2.0	
Power Consumption (Watts)	22	22
Energy Efficiency (CFM/Watt)	6.7	5.9
Current (Amps)	0.36 Max	
Power Rating (V/Hz)	110~220/50~60	

TYPICAL SPECIFICATION

Ventilation fan shall be Delta Breez model 130HS; ENERGY STAR qualified with Brushless DC Motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 130 CFM and loudness rating of 2.0 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 22 Watts with efficiency rating of 6.7 CFM/Watt at 0.1" static pressure; fan will feature LED indicator running light, motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

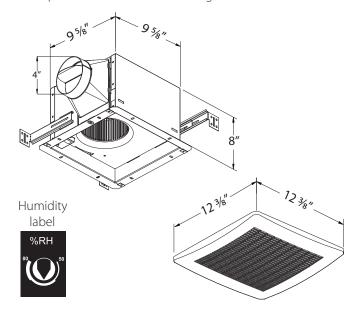



Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: