



Continuous Low Speed:

40 CFM/0.3 Sones @ 0.1 SP, 4.0 Watts
25 CFM/0.8 Sones @ 0.25 SP, 5.3 Watts

Full Speed:

70 CFM/1.1 Sones @ 0.1 SP, 11.3 Watts
60 CFM/1.3 Sones @ 0.25 SP, 12.0 Watts



Description

Low noise ceiling/wall mount ventilating fan with continuous low speed and full speed mode. Fan has been awarded ENERGY STAR® qualified. It is HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2 (local and whole building intermittent operation), CA Title 24 requirements.

DC Motor/Blower

- Power rating of 120 volts/60Hz
- Brushless DC motor engineered to run continuously
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers OFF when impeller is locked abnormally
- Delay time preset positions (0.5, 5, 10, 15, 30, or 60 min)
- User-adjustable time delay has elapsed, and then will automatically change to the user-adjustable low speed airflow(40CFM)

Housing

- Galvanized steel body
- Detachable 3" diameter duct adapter
- Built-in backdraft damper
- Easy installation

Grille

- Attractive design using ABS material
- Attaches directly to housing with torsion springs

LED Indicator

- Green and amber LED indicator lights show continuous low speed and full speed modes


Warranty

- 3-year limited warranty



BreezSlim SLM70D2	Low Speed		Full Speed	
Static Pressure (INCH Aq)	0.1	0.25	0.1	0.25
Air Flow (CFM)	40	25	70	60
Sones	0.3	0.8	1.1	1.3
Power Consumption (Watts)	4.0	5.3	11.3	12.0
Energy Efficiency (CFM/Watt)	10.0	4.7	6.1	5.0
Current (Amps)	0.22 Max			
Power Rating (V/Hz)	120 / 60			

TYPICAL SPECIFICATION

Ventilation fan shall be Delta Breez model SLM70D2; ENERGY STAR qualified with Brushless DC Motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 70 CFM and loudness rating of 1.1 Sones at 0.1" static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 11.3 Watts with efficiency rating of 6.1 CFM/Watt; fan will feature motor lock protection. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

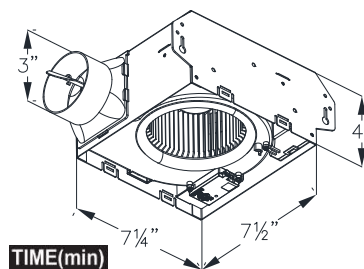

UNIT: INCH

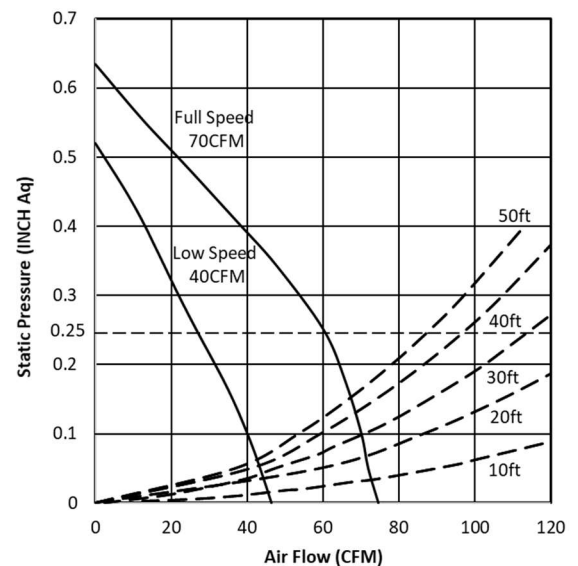

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: