



MODEL SLM70ELED

(Fan / LED Light - 70 CFM)



3" Duct (Standard):
70 CFM / 2.0 Sones @ 0.1 SP, 13.2 Watts
53 CFM / 1.5 Sones @ 0.25 SP, 11.6 Watts



Description

Low noise ceiling mount ventilating Fan/LED Light rated for continuous running. Fan has been awarded ENERGY STAR® qualified. It is HVI, UL and cUL certified, and can be used to comply with ASHRAE 62.2 (local and whole building continuous and intermittent operation).

DC Motor/Blower

- Power rating of 120 volts/60Hz
- Brushless DC motor engineered to run continuously
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers OFF when impeller is locked abnormally
- Self-compensating motor speed for intended airflow when static pressure is encountered

Housing

- Galvanized steel body
- Detachable 3" diameter plastic duct adapter
- Built-in backdraft damper
- Easy installation

Grille

- Attractive design integrating with LED lighting
- Attaches directly to housing with torsion springs

Light

- 13-Watt LED
- Light output 850 Lumens, 3000K
- Dimmable Lighting (dimmer switch not included)
- 13-Watt integrated dimmable LED edge-lit light lasts up to 30,000 hours.



Warranty

- 3-Year limited warranty

TYPICAL SPECIFICATION

Ventilation fan shall be Delta Breez model SLM70ELED; ENERGY STAR qualified with brushless DC motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 70 CFM and loudness rating of 2.0 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 13.2 Watts with efficiency rating of 6.0 CFM/Watts at 0.1" static pressure; motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.


Dimensions



**LED
DIMMABLE**

UNIT: INCH

Fan Curve

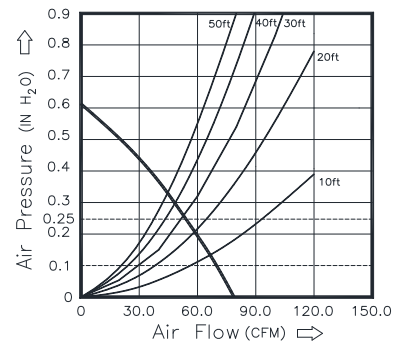

| BreezSlim SLM70ELED | 3" Duct(Standard) | |
|------------------------------|-------------------------------|------|
| | Static Pressure (inches w.g.) | 0.1 |
| Air Flow (CFM) | 70 | 53 |
| Sones | 2.0 | 1.5 |
| Power Consumption (Watts) | 13.2 | 11.6 |
| Energy Efficiency (CFM/Watt) | 6.0 | 5.4 |
| Current (Amps) | 0.29Max | |
| Power Rating (V/Hz) | 120 / 60 | |
| LED Light (Watt) | 13.0 | |

| Model | Quantity | Comments | Project: |
|-------|----------|----------|---------------|
| | | | Location: |
| | | | Architect: |
| | | | Engineer: |
| | | | Contractor: |
| | | | Submitted by: |
| | | | Date: |