



(Fan/Dimmable LED Light with Dual Speed – 80/110 CFM)



Full Speed:

80 CFM/0.4 Sones @ 0.1" SP, 9.0 Watts
80 CFM/1.1 Sones @ 0.25" SP, 14.5 Watts

Full Speed:

110 CFM/1.3 Sones @ 0.1" SP, 16.5 Watts
106 CFM/1.5 Sones @ 0.25" SP, 24 Watts



Description

Low noise ceiling/wall mount ventilating fan rated for continuous running. Fan is ENERGY STAR qualified, HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2 (local and whole building continuous and intermittent operation) and CA Title 24 requirements.

DC Motor/Blower

- Power Rating of 120 volts/60Hz
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Full speed adjustable, 80 or 110 CFM
- Allows fan to operate in full speed mode or continuous low speed mode by manual switch
- For continuous low speed mode, the fan runs continuously at a user-preset lower level (0, 50, 80 CFM)
- Delay time preset positions (0.5, 5, 15, 30, 45, or 60 min)
- Built-in soft start function to increase bearings' life
- Automatically powers OFF when impeller is locked abnormally

Housing

- Galvanized steel body
- Detachable 4" oval metal duct adapter
- Built-in backdraft damper
- Easy installation with mounting flange

Grille

- Attractive design using ABS material
- Attaches directly to housing with torsion springs

Light

- 13-Watt LED Light output 850 Lumens, 3000K, 90CRI
- Dimmable Lighting (dimmable switch not included)

LED Indicator



- Green and amber LED indicator lights show continuous low speed and full speed modes

Warranty

- 3-Year limited warranty

TYPICAL SPECIFICATION

Ventilation fan shall be Delta Breez model SLM80-110DLED-C; ENERGY STAR qualified with Brushless DC Motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 110 CFM and loudness rating of 1.3 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 16.5 Watts with efficiency rating of 6.6 CFM/Watt at 0.1" static pressure; fan will feature motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

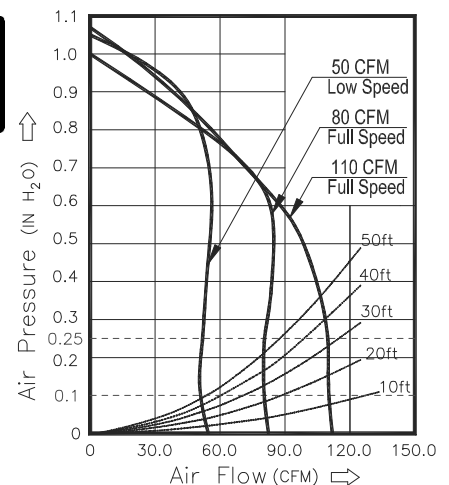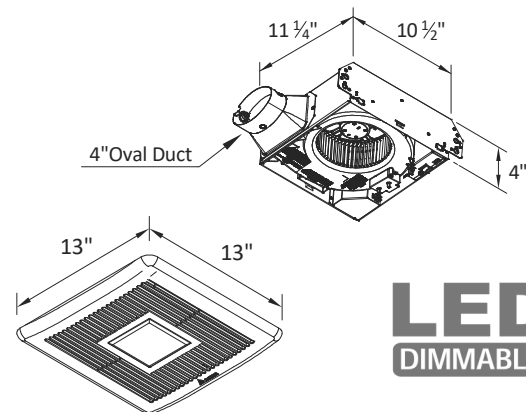

BreezSlim SLM80-110DLED-C								
Fan Speed	Continuous low speed				Full speed			
Static Pressure (inches w.g.)	0.1	0.25	0.1	0.25	0.1	0.25	0.1	0.25
Air Flow (CFM)	50	47	80	80	80	80	110	106
Sones	<0.3	0.8	0.4	1.1	0.4	1.1	1.3	1.5
Power (W)	6	9.5	9.0	14.5	9.0	14.5	16.5	24
Efficiency (CFM/Watts)	8.3	4.9	8.8	5.5	8.8	5.5	6.6	4.4
Current (Amps)	0.6 Max.							
Power Rating (V/Hz)	120 / 60							
Dimmable LED Light (Watts)	13							

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: