



	<p><b>4" Duct (Standard):</b> 100 CFM/1.4 Sones @ 0.1 SP, 13.9 Watts 72 CFM/1.3 Sones @ 0.25 SP, 11.9 Watts</p>		
--	---	--	--

**Description**

Low noise ceiling mount ventilating Fan/Light. Fan is ENERGY STAR® qualified, HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2 Intermittent Local Exhaust, CA Title 24 requirements.

**DC Motor/Blower**

- Power rating of 120 volts/60Hz
- DC Brushless motor engineered to run continuously
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers OFF when impeller is locked abnormally
- Permanently lubricated motor
- Self-compensating motor speed for intended airflow when static pressure is encountered

**Housing**

- Galvanized steel body
- Detachable 4" diameter duct adapter
- Built-in back-draft damper
- Easy installation

**Grille**

- Attractive design using ABS material
- Attached to housing with included grille bracket

**Light**

- (1) GU24 26-Watt CFL lamp included
- Light output 1850 Lumens, 2700K

**LED Indicator**



- Turn the power switch on/off to operate on/off.  
LED indicator will be green when power is on

**Warranty**

- 3-year limited warranty

**TYPICAL SPECIFICATION**

Ventilation fan shall be Delta Breez model GBR100L; ENERGY STAR qualified with DC brushless motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 100 CFM and loudness rating of 1.4 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 13.9Watts with efficiency rating of 7.1 CFM/Watt at 0.1" static pressure; fan will feature LED indicator running light, motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

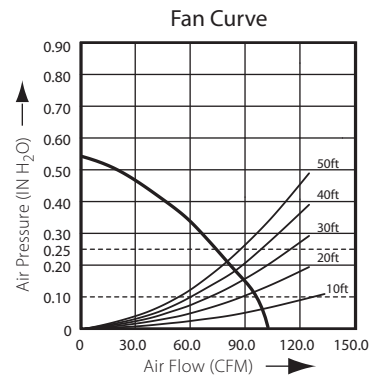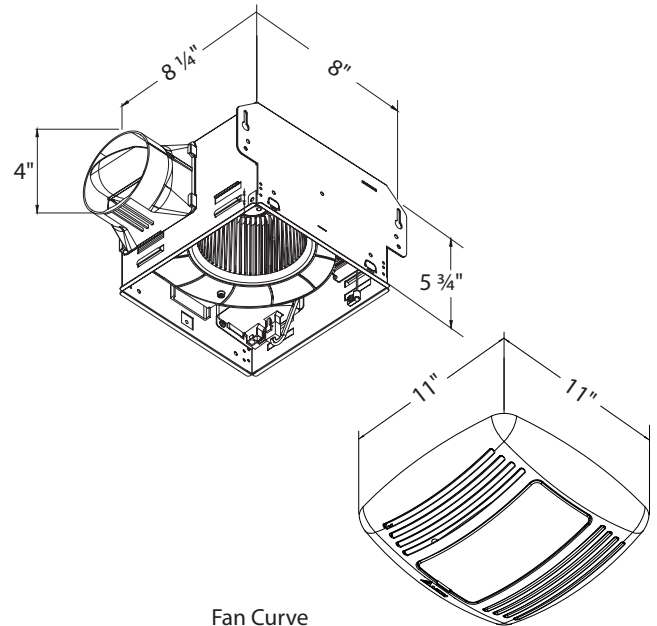

<b>GreenBuilder GBR100L</b>	<b>4" Duct (Standard)</b>	
Static Pressure (inches w.g.)	0.1	0.25
Air Flow (CFM)	100	72
Sones	1.4	1.3
Power Consumption (Watts)	13.9	11.9
Energy Efficiency (CFM/Watt)	7.1	6.3
Current (Amps)	0.63 Max	
Power Rating (V/Hz)	120 / 60	
Lamp (Watt)	26	

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: