

**6" Duct (Standard):**

130 CFM/<0.3 Sones @ 0.1 SP, 11.6 Watts  
124 CFM/1.0 Sone @ 0.25 SP, 20.0 Watts



**Description**

Low noise ceiling mount ventilating fan rated for continuous running. Fan has been awarded ENERGY STAR® Most Efficient 2018. HVI, UL and cUL certified to comply with ASHRAE 62.2 local and whole building continuous and intermittent operation. Meets CA Title 24 requirements.

**DC Motor/Blower**

- Power rating of 120 volts/60Hz
- DC brushless motor engineered to run continuously
- Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor
- Built-in soft start function to increase bearings' life
- Automatically powers off when impeller is locked abnormally
- Self-compensating motor speed for intended airflow when static pressure is encountered

**Housing**

- Galvanized steel body
- Detachable 6" diameter metal duct adapter
- Built-in backdraft damper
- Hanger bars included
- Easy installation

**Grille**

- Attractive design using ABS material
- Attaches directly to housing with torsion springs

**LED Indicator**


- Turn the power switch on/off to operate on/off. LED indicator will be green when power is on

**Warranty**


- 3-year limited warranty

**TYPICAL SPECIFICATION**

Ventilation fan shall be Delta Breez model SMT130; ENERGY STAR qualified with DC brushless motor engineered to run continuously for a minimum 70,000 hours; airflow rating of 130 CFM and loudness rating of <0.3 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 11.6 Watts with efficiency rating of 1 CFM/Watt at 0.1" static pressure; fan will feature LED indicator running light, motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring

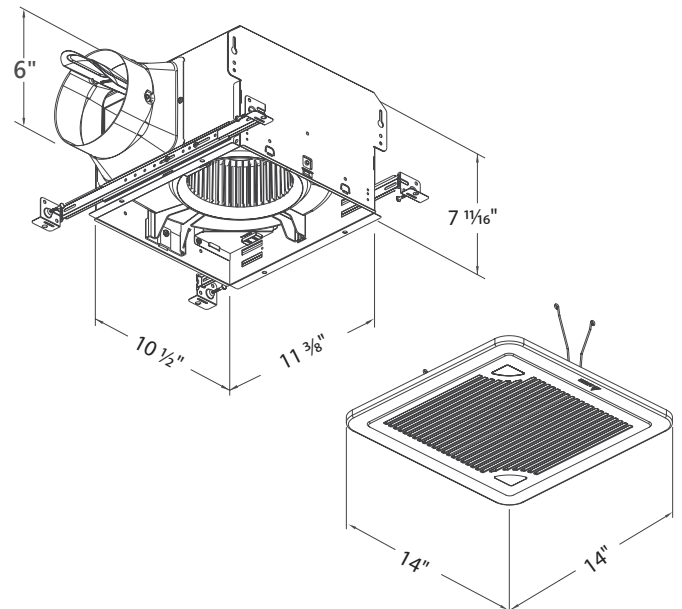

| BreezSmart SMT130             | 6" Duct(Standard) |      |
|-------------------------------|-------------------|------|
| Static Pressure (inches w.g.) | 0.1               | 0.25 |
| Air Flow (CFM)                | 130               | 124  |
| Sones                         | <0.3              | 1.0  |
| Power Consumption (Watts)     | 11.6              | 20.0 |
| Energy Efficiency (CFM/Watt)  | 11.2              | 6.2  |
| Current (Amps)                | 0.44 Max          |      |
| Power Rating (V/Hz)           | 120/60            |      |

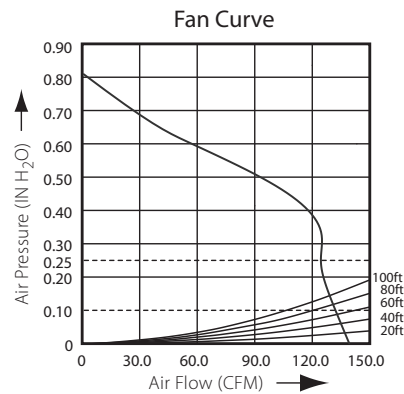

| Model | Quantity | Comments | Project:      |
|-------|----------|----------|---------------|
|       |          |          | Location:     |
|       |          |          | Architect:    |
|       |          |          | Engineer:     |
|       |          |          | Contractor:   |
|       |          |          | Submitted by: |
|       |          |          | Date:         |