



MODEL: 80RLED-ADJ-BN

(Fan/LED Light / -80 CFM)



4" Duct (standard):
80 CFM/ 1.5 Sones @ 0.1 SP, 11.5 Watts
56 CFM/ 1.5 Sones @ 0.25 SP, 11.5 Watts



Description

Low noise ceiling mount ventilating Fan/LED Light rated for continuous running. Fan has been awarded ENERGY STAR® qualified. It is HVI, UL, and cUL certified, and can be used to comply with ASHRAE 62.2(local intermittent operation). No attic access needed.

DC Motor/Blower

- Power rating of 120 volts/60Hz
- DC brushless motor engineered to run continuously Motor equipped with thermal cutoff fuse
- Removable with permanently lubricated plug-in motor Built-in soft start function to increase bearings' life
- Automatically powers OFF when impeller is locked abnormally

Housing

- Galvanized steel body
- Detachable 4" diameter plastic duct adapter Built-in backdraft
- Easy installation

Light

- 13-Watt LED light included (equivalent to a 60-watt incandescent bulb)
- Light output 1000 Lumens, 80CRI, 2700K, 4000K, 5000K(adjustable color temperature)
- Dimmable Lighting(dimmer switch not included)

Grille



- Attractive design using ABS material
- Attaches directly to housing with torsion springs
- Manufacturer Color/Finish: Brushed Nickel

Warranty

- 3-year limited warranty


TYPICAL SPECIFICATION

Ventilation fan shall be Delta Breez model 80RLED-ADJ-BN; ENERGY STAR qualified with DC brushless motor engineered to run continuously for a minimum 70,000 hours ; airflow rating of 80 CFM and loudness rating of 1.5 Sones at 0.1 static pressure as certified by the Home Ventilating Institute (HVI); power consumption of 11.5 Watts with efficiency rating of 7.2 CFM/Watt at 0.1" static pressure; motor lock protection and self-compensating motor speed for intended airflow when static pressure is encountered. UL and cUL listed for tub/shower enclosure when used with GFCI-protected branch circuit wiring.

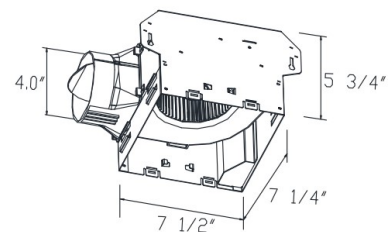

LED
DIMMABLE

Unit: inch

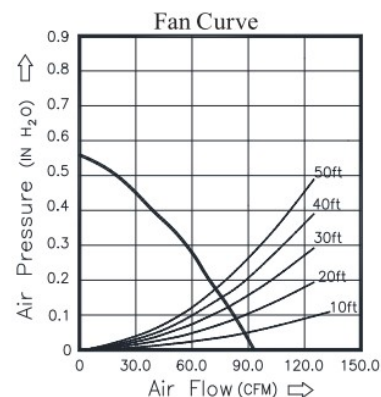

BreezIntegrity 80RLED-ADJ-BN	4" Duct (Standard)	
Static Pressure (inches w.g.)	0.1	0.25
Air Flow (CFM)	80	56
Sones	1.5	1.5
Power Consumption (Watts)	11.5	11.5
Energy Efficiency (CFM/Watt)	7.2	6.2
Current (Amps)	0.14 Max	
Power Rating (V/Hz)	120/60	
LED Light (Watts)	13	

Model	Quantity	Comments	Project:
			Location:
			Architect:
			Engineer:
			Contractor:
			Submitted by:
			Date: