


Boost Controller

VFRU-HERV-01BS

Features

- ▲ Power indicator LED
- ▲ Powered by low voltage from ERV or HRV
- ▲ Boost mode with 1-, 2-, and 4-hour countdown timer
- ▲ Three air flow percentage settings (100%/80%/50%)


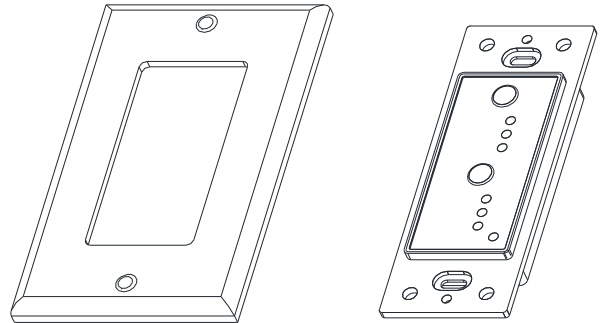


Application

Single Family / Multi Family / Townhouses / Offices / School

Dimensions unit: inch

Panel

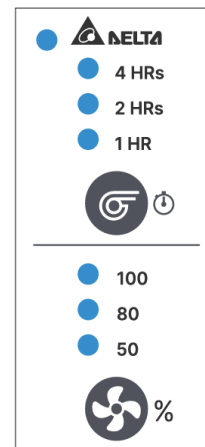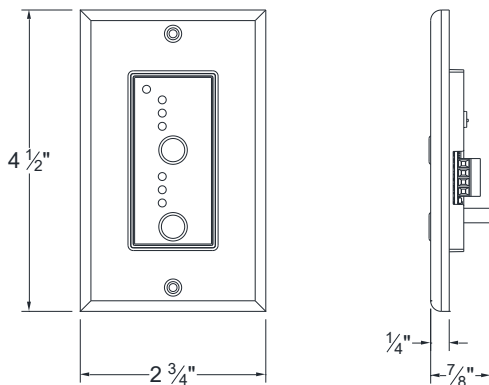

Specifications

- Rating Voltage : DC12V
- Operation Temperature : 14°F ~104 °F (-10°C ~ +40°C)
- Boost Mode : 4/2/1 hrs
- Air Flow Percentage : 100/80/50%

Notes: VFRU-HERV-01BS and VFRU-HERV-02BS cannot be used in the same ERV control loop.