


Boost Controller

VFRU-HERV-02BS

Features

- ▲ Power indicator LED
- ▲ Powered by low voltage from ERV or HRV
- ▲ Boost mode with 20-, 40-, and 60-mins countdown timer


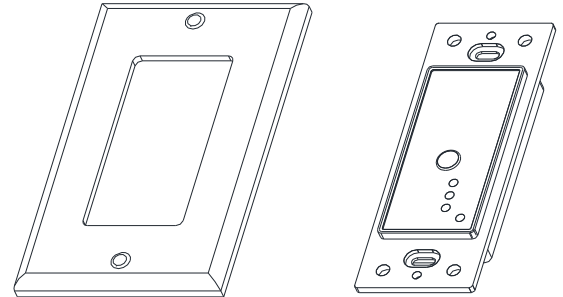


Application

Single Family / Multi Family / Townhouses / Offices / School

Dimensions unit: inch

Panel

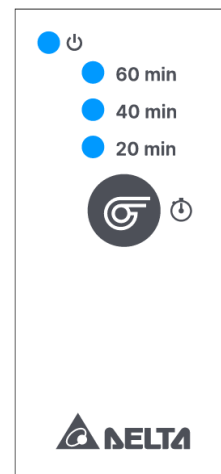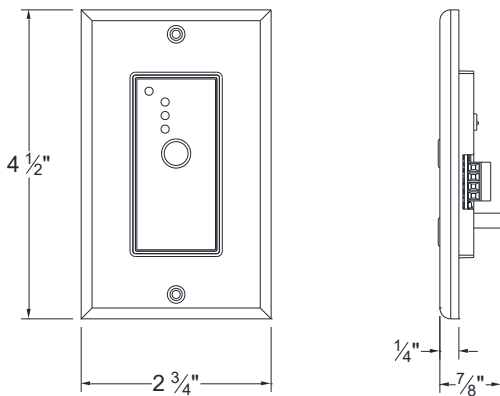

Specifications

- Rating Voltage : DC12V
- Operation Temperature : 14°F ~104 °F (-10°C ~ +40°C)
- Boost Mode : 60 / 40 / 20 mins

Notes: VFRU-HERV-01BS and VFRU-HERV-02BS cannot be used in the same ERV control loop.